



HoundHouse Installation Tips:


- 1. Remove the mat to easily view the metal frames.
- 2. Lay the kennel flat on the ground (diagram 1).
 - Frames may have shifted during transportation. Ensure they are not crossed before attempting to assemble.
- 3. While the kennel frames are flat, pull the frames out from all four corners approx. 6+ inches.
 - Do not force, if poles are caught, look for obstructions or the rivet catching (diagram 2).
- 4. Roll the frame onto the clip ABOVE the rivet (diagram A).
- 5. Stand the frames upright. Insert middle ridge tube into back of the HoundHouse frame with pointed end (diagram B).







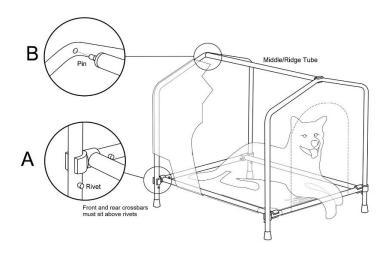



Watch the Video!





Heininger Holdings - 2222 Queen Street Bellingham, WA 98229-4753

Ph: 360.756.2411 Toll Free: 888.722.5240 Fax: 360.756.2414

www.heininger.biz Email: sales@heininger.biz